
2018-09-04


HAWAI'I PACIFIC UNIVERSITY NEW HEALTH SCIENCE CENTER RELOCATION TO WATERFRONT PLAZA ROOM CRITERIA

GENERAL CLASSROOM

	ROOM TYPE:	CLASSROOM
	PROPOSED ASF:	Varies, refer to plan
	CAPACITY:	Varies
	ACTIVITIES	flexible classroom for team-based learning, lecture, demonstration and clinical group stations.
USE	ACCESS	Faculty, Students, Staff
	FREQUENCY/ HOURS	TBD
	ADJACENCIES	Prefunction/Prebrief, Lockers, Main Entry / elevations
	CEILING HEIGHTS	11'-0" minimum for ceiling mounted projection
		Acoustical Tile with Gyp Soffits as needed
	CEILING TREATMENTS	
CHARACTERISTICS	FLOOR FINISH	Resilient Sheet Flooring
	WALL FINISH	Painted gypsum board / Dry Erase Wallcovering or Panels
	NATURAL LIGHTING	N/A
	CASEWORK	Base cabinets, lockable; AV cabinet (confirm with HPU)
	ACCESSORIES	Full height marker board with aluminum rail 2 walls. Tackable surfaces as required by HPU
	HARDWARE	Passage lock
	Innowite	
	OTHER	
TECHNOLOGY	AUDIO/ VISUAL	Integrated control at AV cabinet with wireless touch screen control pad for instructor's podium; ceiling-mounted projectors; motorized projection screens or flat screen monitors; Ceiling-mounted microphones; Wall-mounted Line Array speakers - confirm with HPU
	NETWORK	Wi-fi
	COMMUNICATIONS	Phone/data for Distance learning as required by HPU
	VENTILATION	Heating/Cooling; programmable thermostat control panel
	ELECTRICAL	Wall mounted power; Floor-mounted power as needed
MECHANICAL, ELECTRICAL &		IFD lighting dimensions and several with control of fromt of rooms or
PLUMBING	ARTIFICIAL LIGHTING	LED lighting; dimmable and zoned with control at front of room or back of room; integrated lighting control system.
	PLUMBING	
EQUIPMENT AND FURNISHING		Mobile chairs(nesting?), Mobile tables(nesting?), Adjustable height mobile instructor's podiums.
REMARKS		May flex as skills lab. Provide enough power outlets for electronic charging

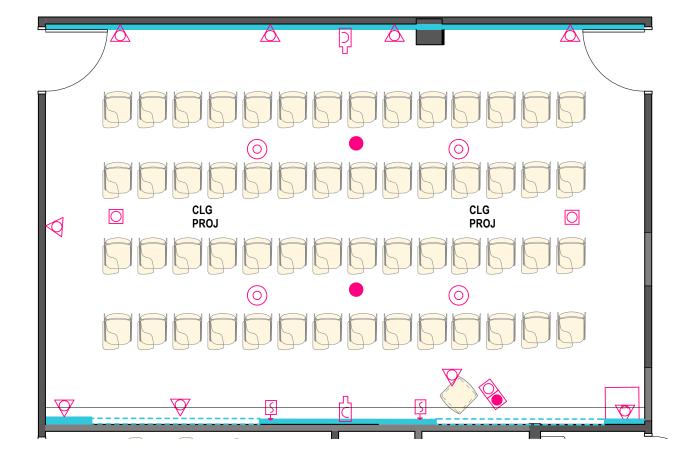

LEGEND



PERKINS+WILL

WALL PLATE		FLAT SCREEN MONITOR
		WHITEBOARD/WRITABLE WALL
FLOOR BOX	(======)	PROJECTION SCREEN
		SHORT THROW PROJECTOR
EQUIPMENT CREDENZA	1 1	
		6'-0" x 6'-0" GRID TO REPRESENT
IXED		INFRASTRUCTURE LOCATION OPTIONS
	+	(POWER/DATA/AV/IT) IN CEILING
MOBILE		AND FLOOR AS REQUIRED